


**INSTRUMENT
APPROACH
CHART - ICAO**

AD ELEV **68 FT**
HEIGHTS RELATED TO
THR RWY 24 ELEV **60 FT**

TALLINN RADAR 127.905
ÄMARI TOWER 122.100 / 257.800

**ÄMARI (EEEE)
MILITARY AERODROME**
ILS or LOC RWY 24
(CAT C;D;E)

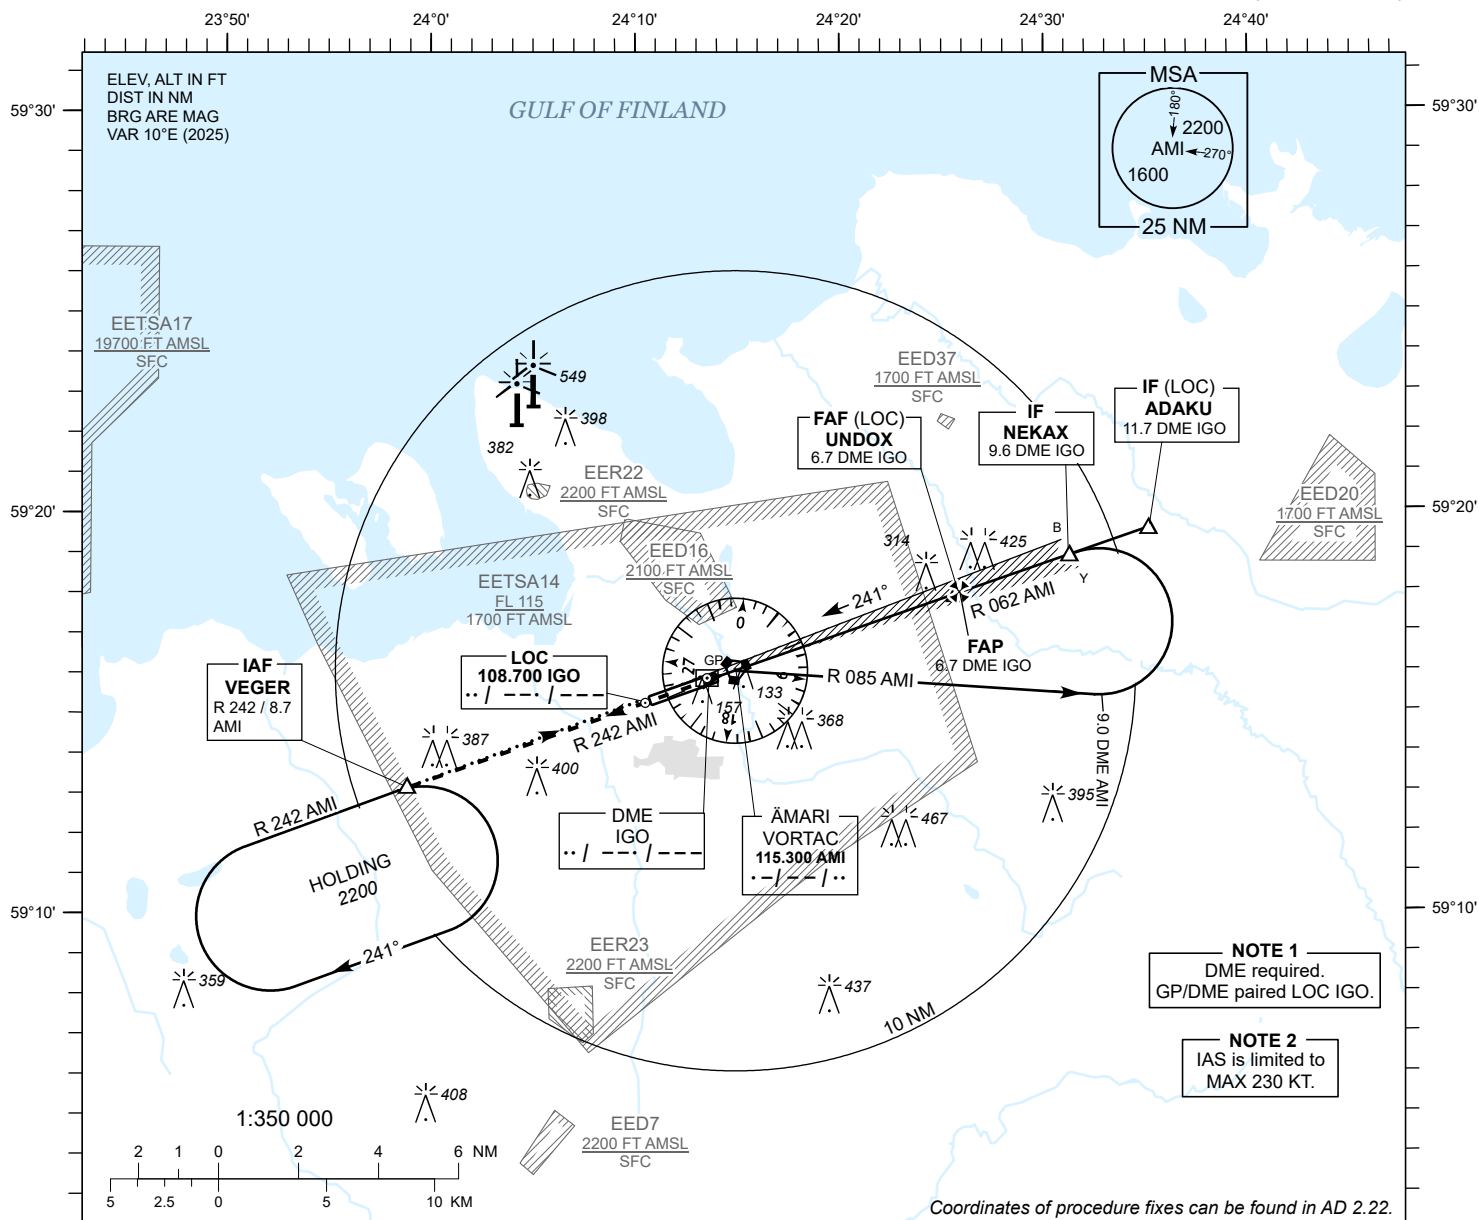

MISSED APPROACH

Climb on track 241 to 2200 and expect radar vectors. Contact TALLINN RADAR CH 127.905.


COMMUNICATION FAILURE

Climb straight ahead. Join VEGER holding climbing to 2200. Start new approach after one full holding and land.

TRANSITION ALT 5000

DME IGO	1 NM	2 NM	3 NM	4 NM	5 NM	6 NM
ALT	390	700	1020	1340	1660	1980
HGT	(330)	(640)	(960)	(1280)	(1600)	(1920)

Table for LOC ONLY approach.

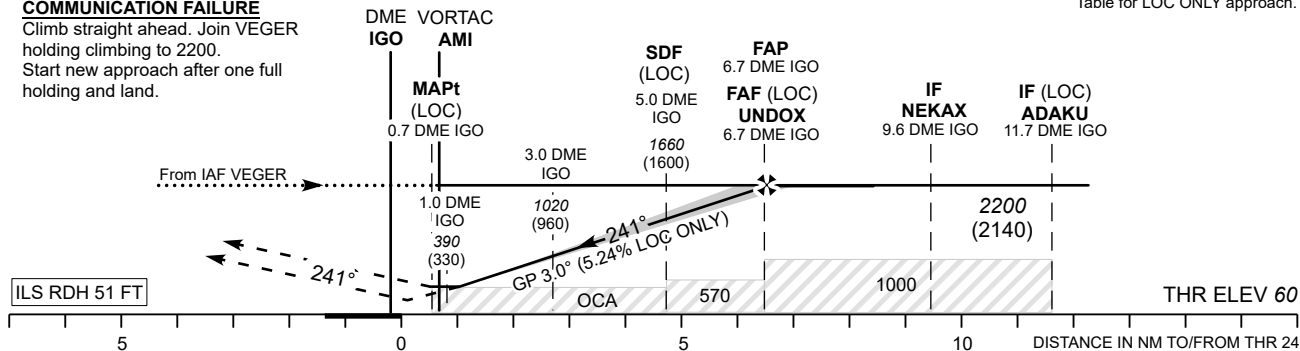

OCA (H)		C	D	E
Straight-in Approach	CAT I	318 (258)	328 (268)	347 (287)
	LOC ONLY	570 (510)		
	LOC ONLY + SDF	400 (340)		
Circling		800 (730)		970 (900)

		Timing not authorized for defining the MAPt.									
Rate of descent	LOC ONLY	KT	100	120	140	160	180	200	220		
	FAF- MAPt 6.0 NM	MIN : SEC	3:36	3:00	2:34	2:15	2:00	1:48	1:38		
	Rate of descent	FT / MIN	535	640	745	850	960	1065	1170		

CHANGES: Magnetic variation and bearings, EER22, EER23, EED37 and EETSA14 added, editorial.